


- LEGEND:**
- 50x50mm LV CABLE TRUNKING
 - 100mm DATA CABLE BASKET

1. THE ELECTRICAL INSTALLATION MUST COMPLY IN FULL WITH THE REQUIREMENTS OF BS 7671 LATEST EDITION OF THE IET WIRING REGULATIONS, INCLUDING ANY ASSOCIATED GUIDANCE NOTES & AMENDMENTS, PLUS APPLICABLE HTML DOCUMENTS.
2. ALL NEW SOCKET OUTLETS & ACCESSORIES SHALL BE OF THE MK LOGIC PLUS RANGE (WHITE PAK FINISH).
3. THE ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR THE CO-ORDINATION OF ALL ELECTRICAL SERVICES, INCLUSIVE OF DEVICE POSITIONS, FINAL LOAD SIZES etc. & MUST LIAISE WITH THE MAIN CONTRACTOR. MECHANICAL CONTRACTOR & OTHER RELEVANT PARTIES REGARDING SETTING OUT ON SITE.
4. ELECTRICAL CONTRACTOR SHALL UNDER TAKE A SITE SURVEY TO FAMILIARISE THEMSELVES WITH THE BUILDING, EXISTING SERVICES & ASSOCIATED RESTRICTIONS.
5. ALL EXISTING MAIN CONTAINMENT RUNS MUST BE RETAINED UNLESS THEY DIRECTLY AFFECT THE WORKS BEING UNDERTAKEN. THE ELECTRICAL CONTRACTOR SHALL ALLOW TO RELOCATE / DIVERST SERVICES WHERE NECESSARY.
6. ANY REDUNDANT CABLEING MUST BE REMOVED BACK TO THE POINT OF ORIGIN/DISTRIBUTION BOARD.
7. IT MUST BE NOTED THAT ADJACENT AREAS WILL REMAIN OPERATIONAL DURING THE CONTRACT PERIOD, & AS SUCH, DUE CARE & ATTENTION MUST BE MADE TO ENSURE ELECTRICAL SUPPLIES ARE UNINTERRUPTED DURING THIS TIME.
8. ALL CABLEING SHALL BE LSZH INSULATED 750V GRADE CABLES WITH STRANDED COPPER CONDUCTORS.
9. ALL NEW CABLEING SHALL BE IN COMPLIANCE WITH THE NEW HARMONISED CABLE COLOURS.
10. ALL WIRING SYSTEMS SHALL BE FULLY TESTED AND COMMISSIONED IN ACCORDANCE WITH THE IET WIRING REGULATIONS AND NICEIC RECOMMENDATIONS PRIOR TO PUTTING INTO SERVICE. AT THE END OF THE PROJECT AN NICEIC COMPLETION CERTIFICATE SHALL BE PROVIDED FOR THE WHOLE INSTALLATION.
11. THE PROJECT SHALL TAKE A PHASED APPROACH, PLEASE SEE THE ARCHITECTS DRAWINGS FOR PROJECT PHASING PLAN.
12. ALL SOCKET POSITIONS SHOWN ON DRAWING ARE INDICATIVE ONLY, FINAL SOCKET POSITIONS AND QUANTITIES ARE YET TO BE CONFIRMED ON SITE.
13. DO NOT SCALE FROM THIS DRAWING, IF IN DOUBT-ASK.

TH	NO/21	FIGURE	J	EF
REV	DATE	DESCRIPTION	BY	VE

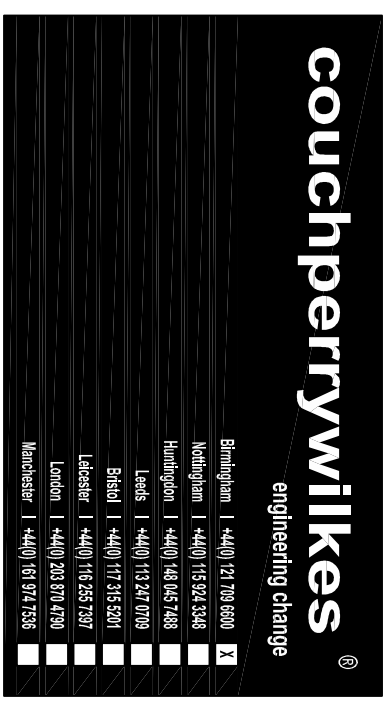

STAGE 4

TENDER ISSUE



PHARMACY ADS REPLACEMENT

DRAWING TITLE
**PROPOSED CONTAINMENT LAYOUT
GROUND FLOOR LEVEL**

SCALE (M)	DATE	BY	VE
1-50	NOV21	JF	EF
Field	County	Volume	Level
210640	CPW	XX	00
		DR	E
		Number	100
		Station	D3
		Reason	T01

CPW Product No. 210640
210640-CPW-XX-00-DR-E-200 D3 101

[X] 1269-DESM-00-ZZ-M3-A-0001